




MAIN FEATURES

- Frame width: 500 mm
- Designed for wall-hung toilets with 18 or 23 cm hole spacing
- Adjustable 3/6 l flush with Water Stop function
- Only 4 fixing points
- Corner installation possible
- Monolithic tank made using blow molding technology
- Tank insulation prevents condensation
- Brass connector with the option of connecting the water supply from the left side or from the top
- Brass shut-off valve
- Adjustable wall brackets protected against corrosion by a galvanized protective layer
- Replaceable drain valve seat
- Ultra-quiet fill valve (only 22 dB)
- Adjustable bend DN 90/110
- Brakes on the frame legs for easy leveling
- All connection elements included

Symbol: 350/ZPW/500-00-P0



adjustable height	1120 - 1290 mm
width	500 mm
adjustable depth	155 - 235 mm
weight	13,5 kg
distance between bolts	18 / 23 cm
ultra silent valves	yes
damping pad	yes
brass cut-off valve	yes
type of cistern	monolith blow technology

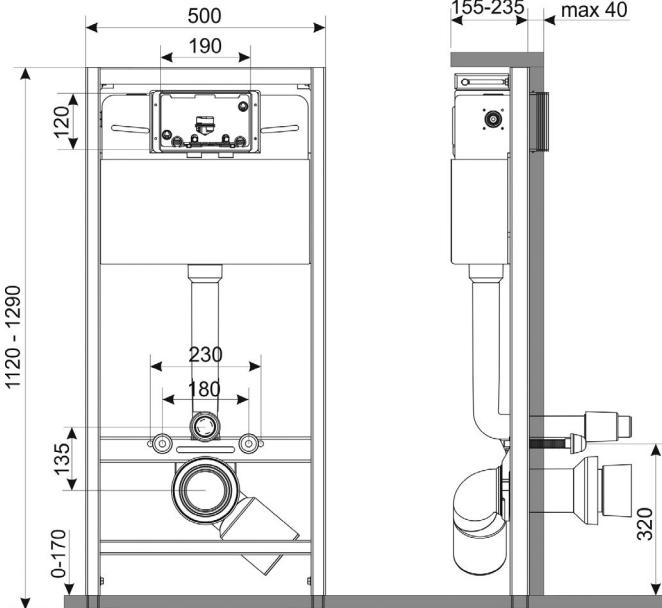




Internal accessories

- 1 - 3/8" x 3/8" connection hose
- 2 - installation connector
- 3 - 1/2" x 3/8" shut-off valve
- 4 - mounting tunnel
- 5 - connector screws
- 6 - tunnel screws



Frame fittings

- 1 - adjustable wall brackets
- 2 - M12 bolts
- 3 - M12 bolt sleeve
- 4 - M12 nuts
- 5 - M8 screws
- 6 - M8 nuts
- 7 - M8 washers
- 8 - expansion bolts
- 9 - dowel screws
- 10 - dowel washers

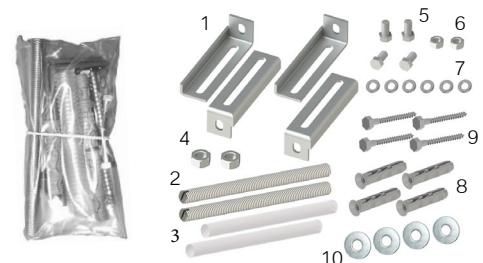

Connection accessories of hung toilet

1 - connector DN90 (176 mm) with drainage seal
 2 - connector DN45 (176 mm)
 3 - 4-lip seal
 4 - security plug Ø 90
 5 - plug of inlet pipe
 6 - bushings bolts
 7 - covers of bushings bolts
 8 - nuts M12
 9 - flat washers M12



Sound-absorbing pad for a wall-hung bowl

Recomendet aditional accessories

Choke splash preventing



Refreshing cube dispenser Water Fresh

