




## MAIN FEATURES


- The narrowest frame of KK-POL with the smallest monolit cistern on market
- Frame width: 400 mm
- Designed for wall-hung toilets with 18 or 23 cm hole spacing
- Adjustable 3/6 l flush
- Only 4 fixing points
- Corner installation possible
- Tank insulation prevents condensation
- Brass connector with possible dual-sided water connection
- Brass shut-off valve
- Ultra-quiet fill valve (only 22 dB)
- Adjustable bend DN 90/110
- Brakes on the frame legs for easy leveling
- All connection elements included

Symbol: ZSP/M370/0/K




|                        |                          |
|------------------------|--------------------------|
| adjustable height      | 1160 - 1330 mm           |
| width                  | 370 mm                   |
| adjustable depth       | 155 - 235 mm             |
| weight                 | 11,5 kg                  |
| distance between bolts | 18 / 23 cm               |
| ultra silent valves    | yes                      |
| damping pad            | no                       |
| brass cut-off valve    | yes                      |
| type of cistern        | monolith blow technology |

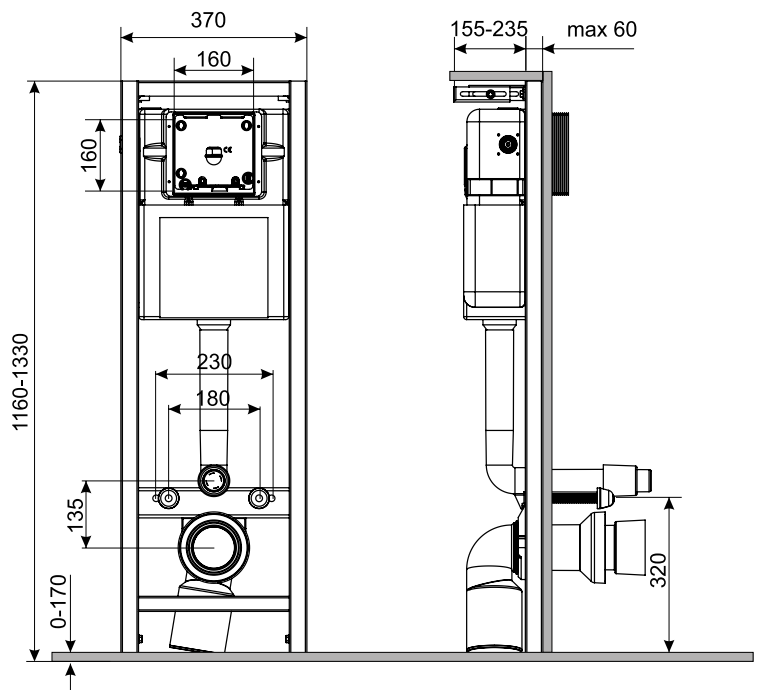

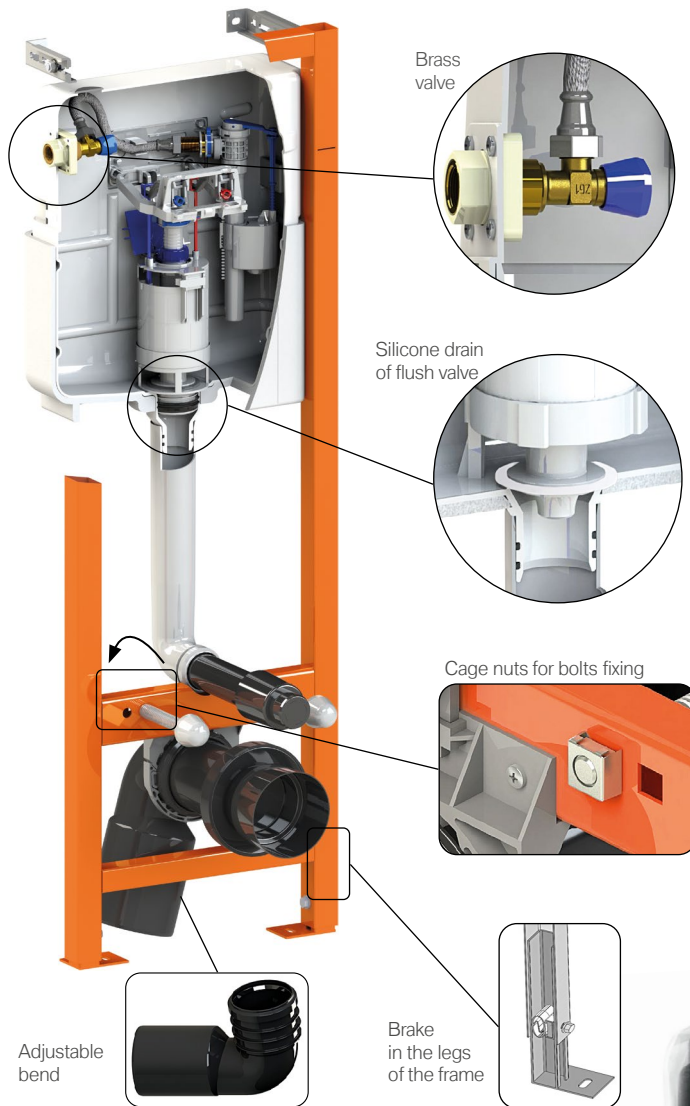

## Internal accessories

- 1 - 3/8" x 3/8" connection hose
- 2 - installation connector
- 3 - 1/2" x 3/8" shut-off valve
- 4 - mounting tunnel
- 5 - connector screws
- 6 - tunnel screws

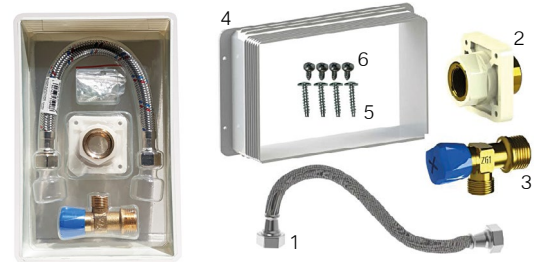

## Frame fittings

- 1 - adjustable wall brackets
- 2 - M12 bolts
- 3 - M12 bolt sleeve
- 4 - M12 nuts
- 5 - M8 screws
- 6 - M8 nuts
- 7 - M8 washers
- 8 - expansion bolts
- 9 - dowel screws
- 10 - dowel washers

## Connection accessories of hung toilet

- 1 - connector DN90 (176 mm) with drainage seal
- 2 - connector DN45 (176 mm)
- 3 - 4-lip seal
- 4 - security plug Ø 90
- 5 - plug of inlet pipe
- 6 - bushings bolts
- 7 - covers of bushings bolts
- 8 - nuts M12
- 9 - flat washers M12




## Recomendet additional accessories

Choke splash preventing



Toilet block dispenser Water Fresh



Square button plates

